





RP-OP336F

Fiber Optic Crimp tool

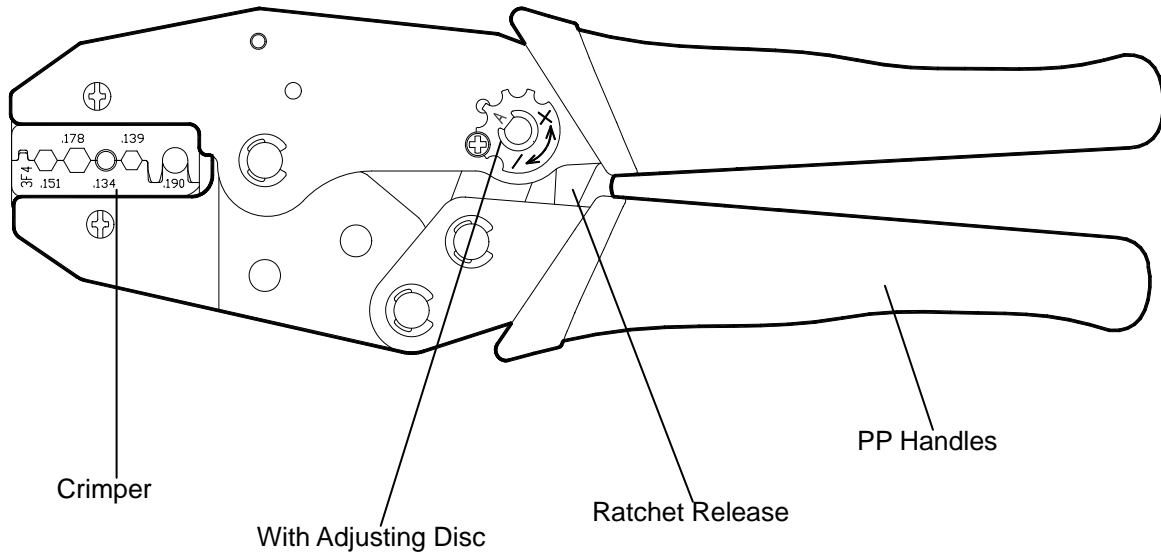

Specification

Crimping Range	<ul style="list-style-type: none"> <table border="1"> <tr> <td></td> <td>.151"</td> <td>.178"</td> <td>.134"</td> <td>.139"</td> <td>.190"</td> </tr> <tr> <td></td> <td>3.84mm</td> <td>4.52mm</td> <td>3.40mm</td> <td>3.53mm</td> <td>4.83mm</td> </tr> </table> 		.151"	.178"	.134"	.139"	.190"		3.84mm	4.52mm	3.40mm	3.53mm	4.83mm
		.151"	.178"	.134"	.139"	.190"							
	3.84mm	4.52mm	3.40mm	3.53mm	4.83mm								
Description	Fiber Optic ST,SC,LC connectors												
Length	<ul style="list-style-type: none"> 8.7" (220±3mm) 												
Weight	<ul style="list-style-type: none"> 500g 												
Material	<ul style="list-style-type: none"> Frame –Middle Carbon Steel Crimper - Made Of Off Wax 												
Finished	<ul style="list-style-type: none"> Black Oxide Finished With Hardened 												

Ordering information

RP-OP336F Fiber Optic Crimp tool- Hex size .151" .178" .134" .139" .190"