

RPT-3210TR | RPT-3220TR
1000VA~2000VA Line Interactive UPS,
Rack / Tower Type




Features

- Controlled by a technologically advanced microprocessor guaranteeing high reliability
- Rack / tower convertible design
- Equipped with 2-steps boost & 1-step buck AVR to stabilize output voltage
- Provides lightning, surge, overload, and short-circuit protection
- Constant current, constant voltage battery charger (CCCV Battery Charger)
- UPS will shut down upon battery low ; UPS will restart automatically upon AC recovery (Auto-restart)
- Built-in DC start function enables UPS to be started without AC power supplied
- Tel / Modem / Fax / Internet surge suppression
- Management software is designed to monitor and control UPS status
- Built-in DC start function enables UPS to be started without AC power supplied

Interface


Front Panel

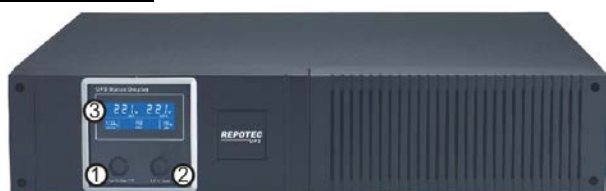


1. **Master Power Switch:** Turn on / off the UPS.
2. **UPS test Switch:** When UPS is working on AC mode, it also activates the UPS's self-test by press this button.
3. **LCD display**

Rear Panel

■ **European socket type:**



■ **Nema 5-15R socket:**

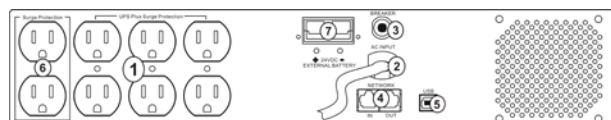

1. **Outlets**
2. **AC Input**
3. **AC breaker**
4. **Tel / Modem Spike Protection Port:** Telecom transfer ports provide users to extend the applications.
5. **Communication Interface Port:** USB port.
6. **Surge Protection Only**
7. **External Battery Connector (Optional)**

Specifications

Model		RPT-3210TR	RPT-3220TR
Capacity	VA	1000VA / 600W	2000VA / 1200W
Input	Voltage	110/115/120VAC or 220/230/240VAC	
	Range	-30% +25%	
	Frequency	50/60Hz auto-sensing	
Output	Voltage (AC/Batt. Mode)	110/115/120VAC or 220/230/240VAC +/-10%	
	Frequency (AC/Batt. Mode)	AC mode: 47-53Hz for 50Hz or 57-63Hz for 60Hz ; Battery mode:50Hz or 60Hz +/- 1Hz	
	Waveform	Simulated Sinewave	
	Transfer Time	Less than 6ms (typical)	
	European type + IEC-320	European type * 2pcs + IEC * 4pc	
	Nema 5-15R socket	Nema5-15R * 6pcs with back-up + 2pcs surge only	
Battery	Battery Type	12V/7AH *2PCS	12V/9AH *2PCS
	Recharge Time	5 hours to 90% after complete discharge	
	Battery protection	Over Charge & Over Discharge Protection	
	Advanced Battery Management	Yes	
	Battery Back-up Time	It depends on connecting loads and external battery packs	
Function	Display (LCD)	I/P & O/P Voltage & Frequency, Load %, Battery %	
	Alarm	Buzzer on Back-up mode, Battery low, Overload	
	Output Short Protection	AC fuse and Electronic circuit(Line mode); Electronic circuit(Back-up mode)	
	Communication Port (USB)	Shutdown Software for Windows	
	Modem/Phone/ Protection	RJ-45	
	Lightning/Surge Protection	175Joules	
	AVR(Auto Voltage Regulation)	Boost/Buck	
	DC start Function	Yes	
	Auto. Restart UPS	Yes	
Over/Under Voltage Protection	Yes		
Safety Standard	LVD	CE(EN60950-1:2006+A11:2009+A1:2010+A12:2011	
	EMC	CE(EN55022:2010 ; EN55024:2010)	
Environment	Operating Temperature	0°C - 40°C (32°F~104°F), at full load	
	Relative Humidity	0~95% relative humidity (non-condensing)	
	Noise Level	Less than 40db (at 1 meter)	
Physical	Dimension, D*W*H	W440 x H88 x D347	
	Net weight	16kgs	19kgs

Ordering information

RPT-3210TR 1000VA / 600W Line Interactive UPS, w/ USB port
RPT-3220TR 2000VA / 1200W Line Interactive UPS, w/ USB port

REPOTEC CO., LTD.

3F., No.258, Liancheng Rd., Zhonghe District., New Taipei City 235, Taiwan

TEL: 886-2-8227-1888 FAX: 886-2-8227-1818